


Technical datasheet for:

EP 110

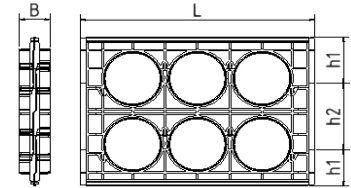

General data

Item	Ducting terminal panels	
Description	The ducting terminal panels EP were developed for the insertion of ducts with diameter 110mm into distribution boxes and small manholes. They consist of PE-HD, are self-clamping at the duct and thus especially easy to install. An afterward installation is also possible.	
Package unit	EP 1x110:	5 Pcs.
	EP 3x110:	2 Pcs.
	EP 6x110:	2 Pcs.
Transport and storage temperature	-40 to +65	°C
Laying or installation temperature	-10 to +50	°C
Operating temperature	-40 to +65	°C

Technical data

Quality	Value	Unit
Material	PolyEthylen PE	
Dimension	h1 = 73; h2 = 154; B = 59; L = 466	mm

gabocom is certified by the quality system following DIN EN ISO 9001, the environmental management system DIN EN ISO 14001 and the energy management system DIN EN 50001.

The used materials meet the REACH default (EU regulation 1907/2006) and the RoHS default (EU guidelines 2011/65).

gabo Systemtechnik GmbH
Am Schaidweg 7
94559 Niederwinkling
GERMANY

Tel. +49 9962 950-200
Fax +49 9962 950-202
info@gabocom.com
www.gabocom.com

Editor: CBR
Release: MK
Date: 05.05.2023
Edition: 3

No responsibility is taken for the currency and completeness of details and information. This document can be revised and supplemented without prior notice. Liability for damages is excluded.